

Date _____

Reference # _____

Quote# _____

Instructions: Complete both sides of this form to describe the line requiring non-IBC control. This information will be used to match the Non-IBC system to the line and application. Use one form per extrusion line. If you have any special considerations, please note them on the drawing below or under special instructions.

Company Name: _____ Contact: _____

Billing Address: _____ City, State, Zip: _____

Email: _____ Phone: _____ Fax: _____

Shipping address is same as billing different than billing (see reverse side for shipping address).

INSTALLATION CONFIGURATION

1. Line Number: _____

5. Cage Type: (Note: 4 sensors are required for STAB or NONE)


2. Typical plant compressed air pressure: _____ psi

3. Layflat Range (Min): _____ (Max): _____

4. What Oscillates? Rotates*? (Check all that apply)

*Rotate refers to dies that never change direction.

- Nothing Die
 Primary Nips Sizing Cage
 Extruder Platform



RADIAL IRIS STAB NONE

6. Die Diameter _____ inches
 mm

7. Air Pipe Threads on Top of Die
 1/8" NPT 1/2" NPT Other
 1/4" NPT 3/4" NPT
 3/8" NPT 1" NPT _____
(Specify)

*Note: Rotating dies require a customer provided rotating plenum. Oscillating dies require a customer provided method to coil and uncoil the air hose.

SYSTEM CONFIGURATION

A. Touch Screen


- Standard 4" Amber monochrome
 Optional 6" Black & White monochrome

B. Layflat Sensors (Standard system comes with two sensors. If you have a STAB cage or NO Cage, 2 additional sensors are needed.)




- _____ (choose from 2, 3 or 4 standard range sensors)
 _____ (choose from 2, 3 or 4 Long Range sensors)
(If layflat (max-min) x .9 < 90 use standard range sensors)

C. Pneumatic BOX (If using DRJ pneumatics, choose HIGH flow if die diameter is greater than 24")

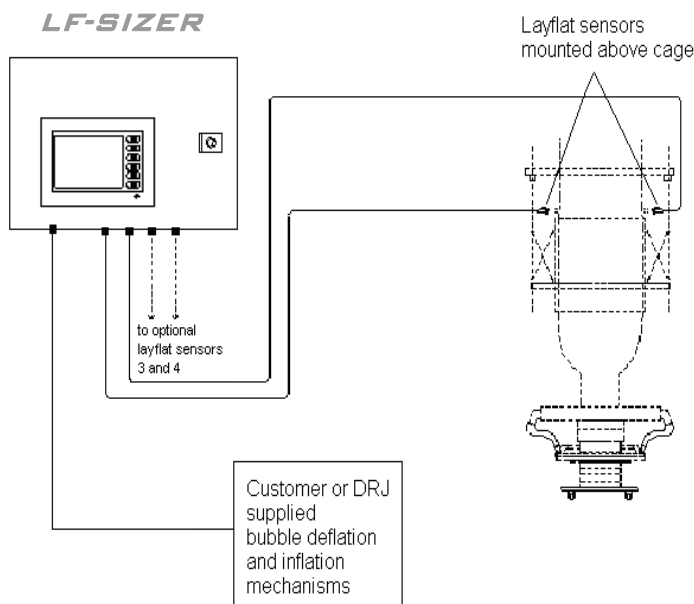- DRJ - Standard Flow: 2 speed inflate, 1 speed deflate
 DRJ - High Flow: 1 speed inflate and deflate
 Kundig Tubair
 User Supplied



D. Power Cable

- Power Cord Modular 7 ft. USA Version 
- Power Cord Modular 2.5m Europe Version 
- Power Cord Modular 2.5m England Version 
- Power Cord no end plug 9 ft.

E. Modem

- Integrated Remote Diagnostic Modem

F. Optional

- Additional Standard Range Sensor; Qty: _____
- Additional Long Range Sensor; Qty: _____
- Kundig FE7 Interface
- Protocol adaptor; specify protocol: _____

G. Auxiliary items to quote:

- Sizing Cage
- Secondary Cage

Special Instructions (note any special materials or product thickness that may be processed):

Ship to address (if different from billing address on front):

Ship to Company Name: _____ Contact: _____

Shipping Address: _____ City, State, Zip: _____

Email: _____ Phone: _____ Fax: _____