

Date _____

Reference # _____

Quote# _____

Instructions: Complete both sides of this form to describe the line requiring non-IBC control. This information will be used to match the Non-IBC system to the line and application. Use one form per extrusion line. If you have any special considerations, please note them on the drawing below or under special instructions.

Company Name: _____ Contact: _____

Billing Address: _____ City, State, Zip: _____

Email: _____ Phone: _____ Fax: _____

Shipping address is same as billing different than billing (see reverse side for shipping address).

INSTALLATION CONFIGURATION

1. Line Number: _____

2. Typical plant compressed air pressure: _____ psi

3. Layflat Range (Min): _____ (Max): _____

4. What Oscillates? Rotates*? (Check all that apply)

*Rotate refers to dies that never change direction.

- Nothing Die
 Primary Nips Sizing Cage
 Extruder Platform

*Note: Rotating dies require the customer to convert the die to an oscillating die with maximum degrees of rotation of 359° degrees. Oscillating dies require the customer to provide a method to coil and uncoil the bubble inflation air line. Also, 4 sensors are recommend when anything oscillates (die or nips).

5. Cage Type: (Note: 3 or 4 sensors are required for STAB or NONE)



RADIAL IRIS STAB NONE

6. Die Diameter _____ inches
 mm

7. Air In Diffuser Threads on Top of Die

- 1/8" NPT 1/2" NPT Other
 1/4" NPT 3/4" NPT
 3/8" NPT 1" NPT (Specify)

SYSTEM CONFIGURATION

A. Touch Screen

- Standard 4" Color TFT Optional 6" Color TFT Touch Screen

B. Layflat Sensors (Standard system comes with two sensors. If you have a STAB cage or NO Cage, 3 or 4 sensors are required.)

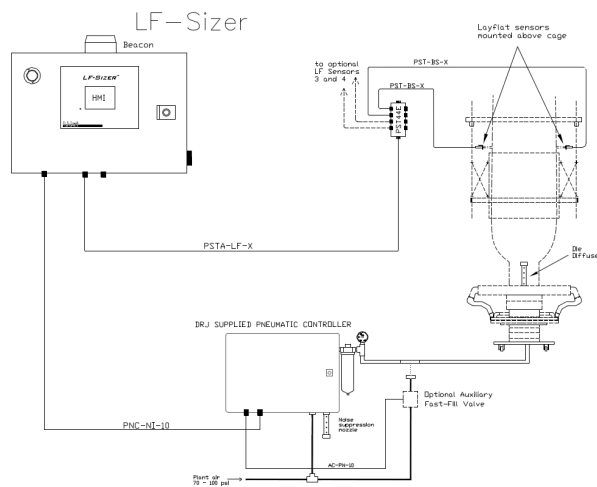
_____ (choose from 2, 3 or 4 standard range sensors)

_____ (choose from 2, 3 or 4 long range sensors)

If layflat range is more than 3800mm (150 inches) choose long range sensors.




C. Pneumatic Box

- Standard - fast inflate, slow inflate, slow deflate
 Kundig Tubair- slow inflate, slow deflate
 User Supplied



D. HMI to Sensor Junction Box: _____
 (choose from 5, 10 or 15 meters)

E. Power Cable

- Power Cord Modular 7 ft. USA Version 
- Power Cord Modular 2.5m Europe Version 
- Power Cord Modular 2.5m England Version 
- Power Cord no end plug 9 ft.

F. Optional

- Additional Standard Range Sensor; Qty: _____
- Additional Long Range Sensor; Qty: _____
- Kundig FE8 Interface
- Protocol adaptor; specify protocol: _____
 Neck Height Control (for high & medium stalk bubbles)

G. Optional second inflation valve to reduce inflation time on large bubbles

Compressed Air

Line Threads

- 3/8 NPT None
- 1/2 NPT
- 3/4 NPT
- 1.0 NPT
- 1-1/4 NPT
- 1-1/2 NPT

Electrical Termination

- Conduit with 18" leads
- Din Connector Plug

Cable Length

- 10 meter (32.8 feet)
- 15 meter (49.2 feet)

H. Additional items to quote:

- Sizing Cage
- Secondary Cage

Special Instructions (note any special materials or product thickness that may be processed):

Ship to address (if different from billing address on front):

Ship to Company Name: _____ Contact: _____

Shipping Address: _____ City, State, Zip: _____

Email: _____ Phone: _____ Fax: _____